




PROFESSIONAL
PLUMBING & HEATING
MANUFACTURER



www.ivanci.com
www.ivanci.ru

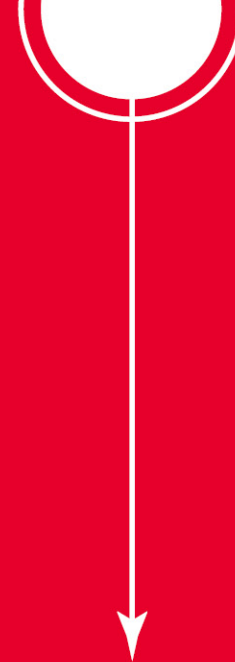

PROFESSIONAL
HEATING PRODUCTS
MANUFACTURER

www.ivanci.com
www.ivanci.ru

2025

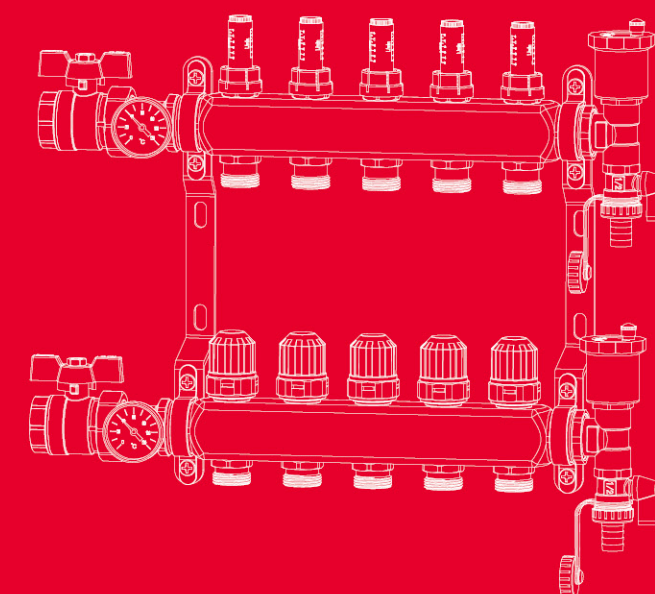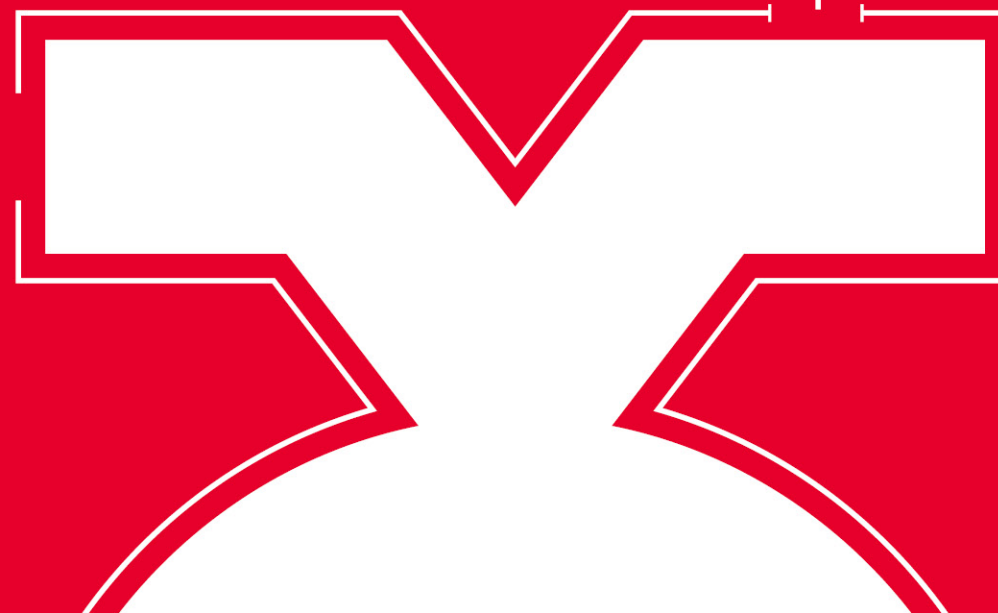



IVANCI

Zhejiang Fansheng Fluid Control Co., Ltd is located in Yuhuan, Taizhou City which it is a leading manufacturer commit to the high quality valves and heating products, including ball valves, gas valves, radiator valves, TRV, TMV and manifolds.

The team of the company comes from a holding company which it covers the R&D, manufacturing and sales of the valves, heating and sanitary wares. Not only we are a experienced team with the management of Amoebe, KPI, and TPS, but also the excellent marketing and sales team to serve and satisfy the customers.

The company is approved with ISO9001, ISO14001. The grade 4A quality control is completely used to the procedure of the forging, machining, assembly and testing to make sure the stable quality. Meanwhile, the products are passed the witness test of the worldwide testing house which it is recognized by 35 countries. So that it is a strong support for our R&D team when they are in the process of the new product development.

Ivanci has always maintained a desire to improve, and strives to become the world's leading manufacturer. We sincerely would like to create the long-term business relationship and be a significant success with you.



INTERNATIONAL CERTIFICATION

IAPMO RESEARCH AND TESTING, INC.
5001 E. Philadelphia Street, Ontario, CA 91761 • Phone (909) 472-4100 • Fax (909) 472-4244 • www.iapmort.org

ANSI ISO/IEC 17065
Product Certification Body
#0032

IAPMO R&T

SCC-Approved
CB-IRP
OCPS
Accredited
CCN

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

Issued To:
ZHEJIANG YIFAN TECHNOLOGY CO., LTD.
PUTIAN INDUSTRIAL AREA, CHUMEN TOWN, TAIZHOU 317605, YUHUAN, CHINA

Product:
Lead Free Plumbing Products

Products are in compliance with the following standard(s):
Section 1417(d) of the Safe Drinking Water Act, and The lead content requirements of Section 116875 of the California Health & Safety Code
NSF/ANSI 372-2020

File Number: 13230

Effective Date: July 2021

Void After: July 2026*

Tom Collins
Chairman, Product Certification Committee

SAIR
Chief Technical Service Officer

*This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

Page 1 of 4

IAPMO RESEARCH AND TESTING, INC.
5001 E. Philadelphia Street, Ontario, CA 91761 • Phone (909) 472-4100 • Fax (909) 472-4244 • www.iapmort.org

ANSI ISO/IEC 17065
Product Certification Body
#0032

IAPMO R&T

SCC-Approved
CB-IRP
OCPS
Accredited
CCN

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

Issued To:
ZHEJIANG YIFAN TECHNOLOGY CO., LTD.
PUTIAN INDUSTRIAL AREA, CHUMEN TOWN, TAIZHOU 317605, YUHUAN, CHINA

Product:
Drinking Water System Components - Health Effects

Products are in compliance with the following standard(s):
NSF/ANSI CAN 61-2020

File Number: N-13229

Effective Date: July 2021

Void After: July 2026*

Tom Collins
Chairman, Product Certification Committee

SAIR
Chief Technical Service Officer

*This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

Page 1 of 4

DVGW
CERT

DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DG-4312DL0571
Registrierungsnummer
registration number

Anwendungsbereich
field of application: Produkte der Gasversorgung
products of gas supply

Zertifikatinhaber
owner of certificate: Zhejiang Yifan Technology Co., Ltd.
Putian Industrial Area, Chumen, CN- Yuhuan, Zhejiang Province

Vertreiber
distributor: Zhejiang Yifan Technology Co., Ltd.
Putian Industrial Area, Chumen, CN- Yuhuan, Zhejiang Province

Produktart
product category: Gasarmaturen: Absperrarmatur <= MOP 5 (4312)

Produktbezeichnung
product description: Absperrarmatur

Modell
model: IV-02030; IV-02032

Prüfberichte
test reports: Baumusterprüfung: B 22/02/3757 vom 29.10.2020 (DBI)

Prüfgrundlagen
test basis: DIN EN 331 (01.04.2016)

Ablaufdatum / AZ
date of expiry / file no.: 29.10.2025 / 22-0265-GNE

24.05.2022 Kö A-1/2
Datum, Bearbeiter, Stuf, Leiter der Zertifikationsstelle
date, issued by, chief, head of certification body

DAKKS
Deutsche
Akkreditierungsstelle
D-53116028-01-05

DVGW
CERT

DVGW-Baumusterprüfzertifikat

DVGW type examination certificate

DG-4312DL0571
Registrierungsnummer
registration number

Anwendungsbereich
field of application: Produkte der Gasversorgung
products of gas supply

Zertifikatinhaber
owner of certificate: Zhejiang Yifan Technology Co., Ltd.
Putian Industrial Area, Chumen, CN- Yuhuan, Zhejiang Province

Vertreiber
distributor: Zhejiang Yifan Technology Co., Ltd.
Putian Industrial Area, Chumen, CN- Yuhuan, Zhejiang Province

Produktart
product category: Gasarmaturen: Absperrarmatur <= MOP 5 (4312)

Produktbezeichnung
product description: Absperrarmatur

Modell
model: IV-02030; IV-02032

Prüfberichte
test reports: Baumusterprüfung: B 22/02/3757 vom 29.10.2020 (DBI)

Prüfgrundlagen
test basis: DIN EN 331 (01.04.2016)

Ablaufdatum / AZ
date of expiry / file no.: 29.10.2025 / 22-0265-GNE

24.05.2022 Kö A-1/2
Datum, Bearbeiter, Stuf, Leiter der Zertifikationsstelle
date, issued by, chief, head of certification body

DAKKS
Deutsche
Akkreditierungsstelle
D-53116028-01-05

IAPMO RESEARCH AND TESTING, INC.
5001 E. Philadelphia Street, Ontario, CA 91761 • Phone (909) 472-4100 • Fax (909) 472-4244 • www.iapmort.org

ANSI ISO/IEC 17065
Product Certification Body
#0032

IAPMO R&T

SCC-Approved
CB-IRP
OCPS
Accredited
CCN

CERTIFICATE OF LISTING

IAPMO Research and Testing, Inc. is a product certification body which tests and inspects samples taken from the supplier's stock or from the market or a combination of both to verify compliance to the requirements of applicable codes and standards. This activity is coupled with periodic surveillance of the supplier's factory and warehouses as well as the assessment of the supplier's Quality Assurance System. This listing is subject to the conditions set forth in the characteristics below and is not to be construed as any recommendation, assurance or guarantee by IAPMO Research and Testing, Inc. of the product acceptance by Authorities Having Jurisdiction.

Issued To:
ZHEJIANG YIFAN TECHNOLOGY CO., LTD.
PUTIAN INDUSTRIAL AREA, CHUMEN TOWN, TAIZHOU 317605, YUHUAN, CHINA

Product:
Ball Valves

Products are in compliance with the following code(s):
Uniform Plumbing Code (UPC®)
National Plumbing Code of Canada

Products are in compliance with the following standard(s):
IAPMO/ANSI Z1157-2014

File Number: 13228

Effective Date: July 2021

Revised Date: August 10, 2021

Void After: July 2026*

Tom Collins
Chairman, Product Certification Committee

SAIR
Chief Technical Service Officer

*This certificate is not evidence of current listing. To verify listing status, visit the IAPMO R&T Product Listing Directory at pld.iapmo.org

This listing period is based upon the last date of the month indicated on the Effective Date and Void After Date shown above. Any change in material, manufacturing process, marking or design without having first obtained the approval of the Product Certification Committee, or any evidence of non-compliance with applicable codes and standards or of inferior workmanship, may be deemed sufficient cause for revocation of this listing. Production of or reference to this form for advertising purposes may be made only by specific written permission of IAPMO Research and Testing, Inc. Any alteration of this certificate could be grounds for revocation of the listing. This document shall be reproduced in its entirety.

Page 1 of 4

WRAS
APPROVED PRODUCT

This certifies that

ZHEJIANG YIFAN TECHNOLOGY CO LTD
has had the undermentioned product(s) examined, tested and certified as being of an appropriate quality and standard as required in the Water Supply (Water Fittings) Regulations and Scottish Water Byelaws, subject to scheme requirements being met when installed.

Model Numbers

C1201.147, C1201.015, C1201.021 & C1201.022
SCALE REDUCERS

The certificate by itself is not evidence of a valid WRAS Approval. Confirmation of the current status of an approval must be obtained from the WRAS Approvals Directory (www.wras.co.uk/directory)

The product so mentioned will be valid until the end of:

September 2027
Certificate No.
2209006

lan Hughes
WRAS Approvals Manager

DIN CERTCO
Gesellschaft für Konformitätsbewertung mbH

CERTIFICATE

Certificate holder
Zhejiang Yifan Technology Co., Ltd
Putian Industrial Area, Chumen town, Yuhuan City
317605 YUHUAN, ZHEJIANG
CHINA

Product
Thermostatic radiator valves

Type, Model
See technical data sheet to the registration number at www.dincertco.tuv.com

Identification No.
93

Testing basis
DIN EN 215:2019-12
CEN KEYMARK Scheme Rules for Thermostatic Radiator Valves (2020-01)

Mark of conformity

Registration No.
011-6T0042

Valid until
2027-01-31

Right of use
This certificate entitles the holder to use the mark of conformity shown above in conjunction with the specified registration number.
See annex for further information.

2022-04-11
Dipl.-Ing. (FH) Sören Scholz
Deputy Head of Certification Body

DAKKS
Deutsche
Akkreditierungsstelle
D-53116028-01-05

DIN

BCC

CERTIFICATE OF QUALITY MANAGEMENT SYSTEM

CERTIFICATION
Certificate No. UKZB22Q0004R0M
Unified social credit code: 91331000MA7ED4PL5B
This is to Certify that the Quality Management System of

ZHEJIANG FANSHENG FLUID CONTROL CO LTD.

is in conformity with
GB/T19001-2016 Idt ISO9001:2015 Standard, applies to

MANUFACTURE OF BRASS VALVE, BRASS FITTING AND SANITARY WARES (TAPS)

REGISTERED ADDRESS: PUTIAN INDUSTRIAL PARK, CHUMEN AREA, YUHUAN CITY, ZHEJIANG, P.R.C.
OPERATION ADDRESS: ZHEJIANG FANSHENG FLUID CONTROL CO LTD DISTRICT, PUTIAN INDUSTRIAL PARK, CHUMEN AREA, YUHUAN CITY, ZHEJIANG, P.R.C.

Date of Initial Issuance: Apr. 26, 2022
Date of Expiration: Apr. 19, 2025

BCC Inc.
President: *朱永芳*

BCC Address: Room 1101, Floor 11, Building 1, Guoyangyuan, Xicheng District, Beijing, P.R.C.
This certificate is valid within scope - specific validity of administrative and certification licensing.
The effectiveness of this certificate shall be maintained by regular surveillance audits.
The validity of the certificate can be required through www.bcc.com.cn or by QR code.
The information of this certificate available for inquiry on CNCA's website: www.cnca.gov.cn
According to: UKAS is granted to BCC for providing audits and certification of ISO9001

BCC

IAF


UKAS

1101020379005

F0675 Manifold

Ideal for both heating and cooling systems.

The stainless steel manifold can be adapted to the individual requirements on-site by using the modular accessories.
Supply: Flowmeter with small pressure loss and shut-off function.
Return: Control and shut-off valve with adaptation M30 × 1,5 .
Heating circuit connection ¾" M with Eurocone.
Ready-to-mount with brackets.

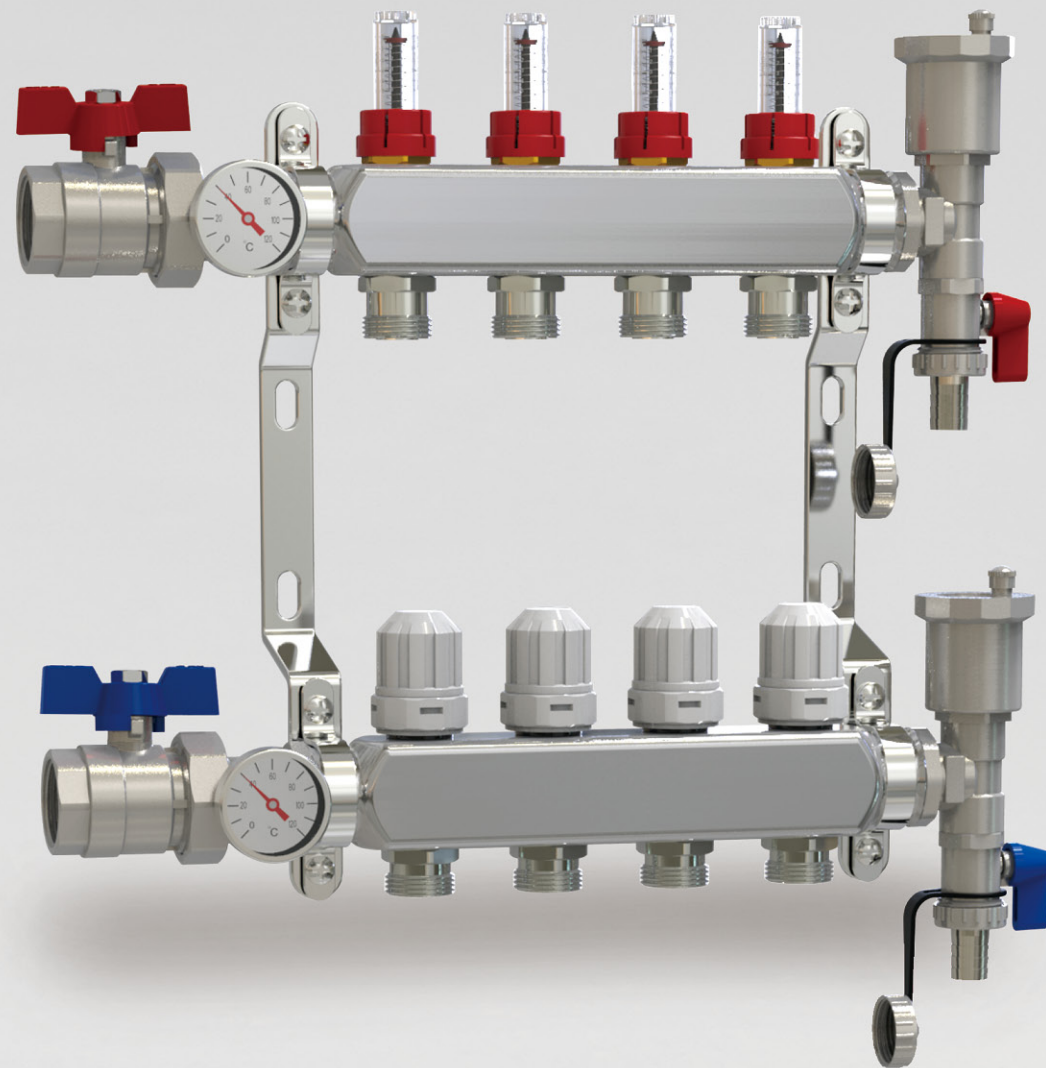

2 - 12WAYS / RESISTANCE TO HIGH TEMPERATURE / STAINLESS STEEL

STAINLESS STEEL MANIFOLD ASSEMBLY WITH
FLOW METER, BALL VALVE, AIR VENT ETC.

Parameter	
Main material	stainless steel
Max.working temperature	90°C
Max.working pressure	10bar
Distance	210mm
Actuator connection	M30x1.5
Adaptor connection	G3/4-16mm&20mm
Main pipes	G3/4" ,G1"

U0100 Water Mixing Center

Size 1"

Technical Features

1. Mixing valve, thread M30x1.5, Used to install the temperature control head, with 30-60 degrees Celsius TEMPERATURE PROBE
2. External thread G1 "M
3. Circle pump connection thread G1-1/2 ", installation itinerary 130mm
4. Circle pump Lift: 6M
5. Circle pump power: 100W
6. Circle pump voltage: 220V/50Hz
7. Use area: 200 square meters
8. System pressure: 1.0MPa



U0100 Water Mixing Center

Size 1"

Technical Features

1. Mixing valve, thread M30x1.5, Used to install the temperature control head, with 30-60 degrees Celsius TEMPERATURE PROBE
2. External thread G1 "M
3. Circle pump connection thread G1-1/2 ", installation itinerary 130mm
4. Circle pump Lift: 6M
5. Circle pump power: 100W
6. Circle pump voltage: 220V/50Hz
7. Use area: 200 square meters
8. System pressure: 1.0MPa



F0670

Underflooring
Manifolds



Size 1", 2x3/4", cone 1", 3x3/4", cone 1", 4x3/4", cone 1", 5x3/4", cone 1", 6x3/4", cone 1", 7x3/4", cone 1", 8x3/4", cone 1", 9x3/4", cone 1", 10x3/4", cone 1", 11x3/4", cone 1", 12x3/4", cone

Features

Working pressure: 10 bar (145 psi)


Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Material: Stainless Steel 304

F0671

Underflooring
Manifolds

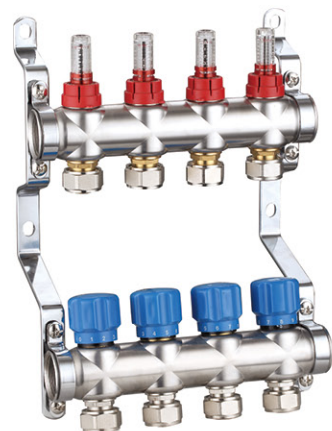

Size 1", 2x3/4", cone 1", 3x3/4", cone 1", 4x3/4", cone 1", 5x3/4", cone 1", 6x3/4", cone 1", 7x3/4", cone 1", 8x3/4", cone 1", 9x3/4", cone 1", 10x3/4", cone 1", 11x3/4", cone 1", 12x3/4", cone

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Material: Stainless Steel 304

F0672

Underflooring
Manifolds



Size 1", 2x3/4", cone 1", 3x3/4", cone 1", 4x3/4", cone 1", 5x3/4", cone 1", 6x3/4", cone 1", 7x3/4", cone 1", 8x3/4", cone 1", 9x3/4", cone 1", 10x3/4", cone 1", 11x3/4", cone 1", 12x3/4", cone

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Material: Stainless Steel 304

F8530

Underflooring
Manifolds



Size 1", 2x3/4", cone 1", 3x3/4", cone 1", 4x3/4", cone 1", 5x3/4", cone 1", 6x3/4", cone 1", 7x3/4", cone 1", 8x3/4", cone 1", 9x3/4", cone 1", 10x3/4", cone 1", 11x3/4", cone 1", 12x3/4", cone

Features

Working pressure: 10 bar (145 psi)


Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Material: Brass Hpb57-3

F8531

Underflooring
Manifolds

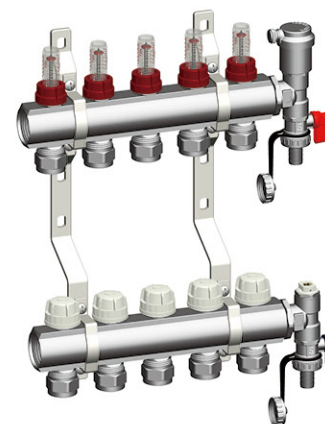

Size 1", 2x3/4", cone 1", 3x3/4", cone 1", 4x3/4", cone 1", 5x3/4", cone 1", 6x3/4", cone 1", 7x3/4", cone 1", 8x3/4", cone 1", 9x3/4", cone 1", 10x3/4", cone 1", 11x3/4", cone 1", 12x3/4", cone

Features

Working pressure: 10 bar (145 psi)


Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Material: Brass Hpb57-3

F8532

Underflooring
Manifolds

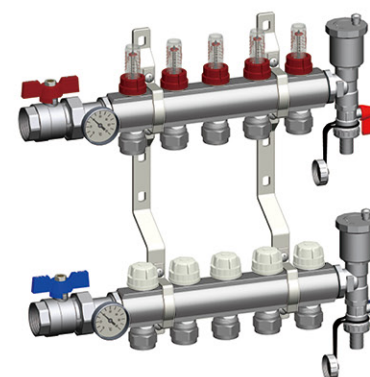

Size 1", 2x3/4", cone 1", 3x3/4", cone 1", 4x3/4", cone 1", 5x3/4", cone 1", 6x3/4", cone 1", 7x3/4", cone 1", 8x3/4", cone 1", 9x3/4", cone 1", 10x3/4", cone 1", 11x3/4", cone 1", 12x3/4", cone

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Material: Brass Hpb57-3

F0650

Manifolds



Size 2way x 3/4"x1/2" 3way x 3/4"x1/2" 4way x 3/4"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F0656

Manifolds Multi-Turn



Size 2way x 3/4"x1/2" 3way x 3/4"x1/2" 4way x 3/4"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F0657

Manifolds Multi-Turn



Size 2way x 3/4"x1/2" 3way x 3/4"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F0658

Manifolds Quarter Turn



Size 2way x 3/4"x1/2" 3way x 3/4"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F0660

Manifolds Multi-Turn



Size 2way x 3/4"x1/2" 3way x 3/4"x1/2" 4way x 3/4"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F2113

Manifolds



Size 2way x 15mm x1" 3way x 15mm x1" 4way x 15mm x1"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F2112

Manifolds



Size 2way x 1/2"x1" 3way x 1/2"x1" 4way x 1/2"x1"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F0672

Euro Connector



Size 16x1/2"x2,0 16x3/4"x2,0 20x3/4"x2,0

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

F0671

Manifold Bracket



Size 210mm

Features

Material : Q235(Nick|plated)

X0035

Flow Meter
Balancing Valve



Size 22mm or 28mm

Features

Maximum pressure : 10 Bar(145Psi)

Flow rate : 42L/min or 70L/min

working temperature : 0-90 °C

Standard : EN1254-2

PRESSURE REDUCING VALVE

Y0601

Pressure Reducing Valve



Size 1/2" 3/4" 1"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0603

Pressure Reducing Valve



Size 1/2" 3/4" 1"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0602

Pressure Reducing Valve



Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0604

Pressure Reducing Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0605

Pressure Reducing Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)



Y0613

Pressure Reducing Valve



Size 22mm x 22mm

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)



Y0614

Automatic Filling Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0615

Automatic Filling Valve



Size 1/2"x1/2"

Features

Working pressure: 1 bar (14.5 psi) - 6 bar (87 psi)
Max. pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0616

Static Balance Valve



Size 1/2" 3/4" 1" 1 1/4" 1 1/2" 2"

Features

Working pressure: 16 bar (232 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

Y0617

Aluminum Gas Regulator



Size 1/2" 3/4"

Features

Working pressure: 0.05 bar (0.725 psi) - 0.5 bar (7.25 psi)
Working temperature: from -20°C to +100°C (from 4 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

SAFETY VALVE

A0607

Safety Relief Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 1.5 bar, 2.5 bar, 3 bar, 6 bar

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

A0609

Safety Relief Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 1.5 bar, 2.5 bar, 3 bar, 6 bar

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

A0608

Safety Relief Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 1.5 bar, 2.5 bar, 3 bar, 6 bar

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

A0618

Safety Relief Valve



Size 1/2"x1/2"

Features

protect pressure: 7 bar

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

A0616

Safety Relief Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

protect pressure: 7 bar

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

AIR VENT VALVE

X0950

Safety Group



Size 3/4" x 3/4"

Features

Working pressure: 3 bar (43.5 psi)

Max. pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

X0955

Safety Group



Size 3/4" x 1"

Features

Working pressure: 3 bar (43.5 psi)

Max. pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

X0941

Safety Group



Size 1/2" x 1" 3/4" x 1"

Features

Working pressure: 3 bar (43.5 psi)

Max. pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

X0954

Safety Group



Size 1/2" x 1"

Features

Working pressure: 3 bar (43.5 psi)

Max. pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

X0953

Safety Group



Size 1/2" x 1"

Features

Working pressure: 3 bar (43.5 psi)

Max. pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

U0120

Thermostatic Mixing Valve



Size 1/2" 3/4" 1" 1 1/4" 15mm 20mm 22mm

Features

Max. water temperature: 85°C
Temperature adjustment range: 33-50°C
Temperature adjustment accuracy: ± 2°C
The temperature difference between hot water and mixed water with anti-scalding function is 15°C

U0122

Thermostatic Mixing Valve



Size 1/2" 3/4" 15mm 20mm 22mm

Features

Max. water temperature: 85°C
Temperature adjustment range: 33-50°C
Temperature adjustment accuracy: ± 2°C
The temperature difference between hot water and mixed water with anti-scalding function is 15°C

U0126

Thermostatic Mixing Valve



Size 1/2"x3/4" 3/4"x1" 1"x1 1/4"

Features

Max. water temperature: 85°C
Temperature adjustment range: 33-50°C
Temperature adjustment accuracy: ± 2°C
The temperature difference between hot water and mixed water with anti-scalding function is 15°C

U0005

Pressure Reducing and Safety Group



Size 22mm

Features

Working medium: Water
Max. water inlet pressure: 12bar
Max. Working temperature: 65°C
Pressure reducing valve setting pressure: 6bar
Safety relief valve setting pressure: 3bar

X1310

Thermostatic Mixing Valve



Size 15mm 22mm 28mm

Features

Working pressure: 10 bar (145 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

P0503

Air Vent



Size 3/8" 1/2" 3/4"

Features

Working pressure: 3 bar (43.5 psi)
Max. pressure: 10 bar (145 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

P0512

Air Vent



Size 3/8" 1/2" 3/4"

Features

Working pressure: 3 bar (43.5 psi)
Max. pressure: 10 bar (145 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

P0100

Bottle Air Vent



Size 1/2"

Features

Working pressure: 3 bar (43.5 psi)
Max. pressure: 10 bar (145 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

P0504

Air Vent



Size 3/8" 1/2" 1"

Features

Working pressure: 3 bar (43.5 psi)
Max. pressure: 10 bar (145 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

P0514

Air Vent



Size 3/8" 1/2" 3/4"

Features

Working pressure: 3 bar (43.5 psi)
Max. pressure: 10 bar (145 psi)
Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)
Thread: ISO228 (equivalent to DIN 259 and BS2779)

X0500

Three-way
Mixing Valve



Size 3/4", 1"

Features

Plastic material: Reinforced nylon PA66
Working pressure: 10 bar
Working temperature: from 90°C
Operating torque: ≤ 3Nm

X0037

Auto Bypass
Valve Angled



China Patent Codes:
CN202322131200.8

Size 15mm or 22mm

Features

Max. pressure: 10 bar (145 psi)
Pressure range: 0.1 - 0.5 bar
Working temperature: 0 - 90°C
Standard: EN1254-2

X0036

Straight Auto
Bypass Valve



CN202322131200.8

Size 15mm or 22mm

Features

Max. pressure: 10 bar (145 psi)
Pressure range: 0.1 - 0.5 bar
Working temperature: 0 - 90°C
Standard: EN1254-2

THERMOSTATIC RADIATOR VALVE

China Patent Codes:
CN202330502870.9

DIN CERTCO
Gesellschaft für Konformitätsbewertung mbH



T0310

T3501

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215



T1676

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215



T0309

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215



T3301

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215



T0307

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215



T0100

Digital Display Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

With digital display screen

Thread: EN215

T0312

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215

T0316

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215

T0317

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215

T8600

Thermostatic Head



Size M30x1.5

Features

Working pressure: 10 bar (145 psi)

Working temperature: from 2°C to 28°C (from 35.6 °F to 82.4 °F)

Thread: EN215

W1102

Angled Thermostatic Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W2102

Straight Thermostatic Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W1010

Angled Thermostatic Valve



Size 3/8"x3/8" 1/2"x1/2" 3/4"x3/4" 1"x1"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W1012

Straight Thermostatic Valve



Size 3/8"x3/8" 1/2"x1/2" 3/4"x3/4" 1"x1"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W3006

Thermostatic Radiator Valve



Size 1/2" 3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W3005

Thermostatic Radiator Valve



Size 1/2" 3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W3003

Manual Radiator Valve



Size 1/2" 3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W3001

Manual Radiator Valve



Size 1/2" 3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W3002

Manual Valve



Size 1/2" 3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W3004

Manual Valve



Size 1/2" 3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0106

Classic Thermostatic Valve



European Patent Codes:

GB6377332D



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0216

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0227

Classic Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0116

Classic Thermostatic Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0223

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0125

Classic Thermostatic Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0244

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0117

Classic Thermostatic Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0217

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0233

Classic Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

W0230

Classic Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0231

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0217

Classic Radiator Valve



Size 1/2"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0244

Classic Radiator Valve



Size 1/2"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0227

Classic Radiator Valve



Size 1/2"x1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0267

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0253

Classic Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0263

Classic Lockshield



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0243

Classic Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0218

Classic Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

RADIATOR VALVE

W1210

Angled Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W2210

Straight Radiator Valve



Size 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0209

Angled Radiator Valve



Size 8mm x 1/2" 10mm x 1/2" 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0208

Straight Radiator Valve



Size 8mm x 1/2" 10mm x 1/2" 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0206

Angled Radiator Valve



Size 8mm x 1/2" 10mm x 1/2" 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0205

Straight Radiator Valve



Size 8mm x 1/2" 10mm x 1/2" 15mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779) / EN1254-2

Opening/closing test: 10000 times

W0202

Angled Radiator Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0203

Straight Radiator Valve



Size 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 10 bar (145 psi)


Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W1207

Angled Lockshield



Size 3/8"x3/8" 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W1206

Straight Lockshield



Size 3/8"x3/8" 1/2"x1/2" 3/4"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W3099

Straight Integrated
Thermostatic Valve



Size 16mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

W3091

Angled Integrated
Thermostatic Valve



Size 16mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

W2020

Straight Integrated
Thermostatic Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

W2030

Straight Integrated
Thermostatic Valve



Size 16mm x 1/2"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

W2010

Convertible Radiator
Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

W0251

H Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0253

H Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W0252

H Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W1802

H Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times

W1803

H Valve



Size 1/2"x3/4"

Features

Working pressure: 10 bar (145 psi)

Working temperature: from -10°C to +100°C (from 14 °F to 212 °F)

Thread: ISO228 (equivalent to DIN 259 and BS2779)

Opening/closing test: 10000 times